
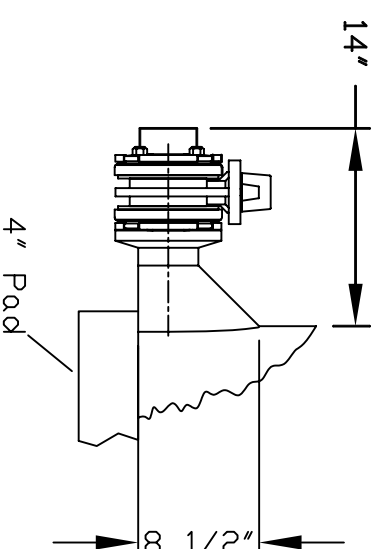


DETAIL "A"
(VALVE LAYOUT & CLEARANCE)
SCALE: NONE

- SULFURIC ACID RESTRICTIONS**
1. Do not store sulfuric acid above 80% concentration. For concentrations equal to or less than 80%, use tanks with equipment numbers equal to or greater than P7376. Do not use tanks with lower equipment numbers for sulfuric acid. Concentrations greater than 80% require Corporate approval.
 2. Sulfuric acid must be less than 100 degrees to be stored in this tank.
 3. Sulfuric acid must be filled through the top of the tank only.
 4. Tank vent must always be open when storing sulfuric acid.

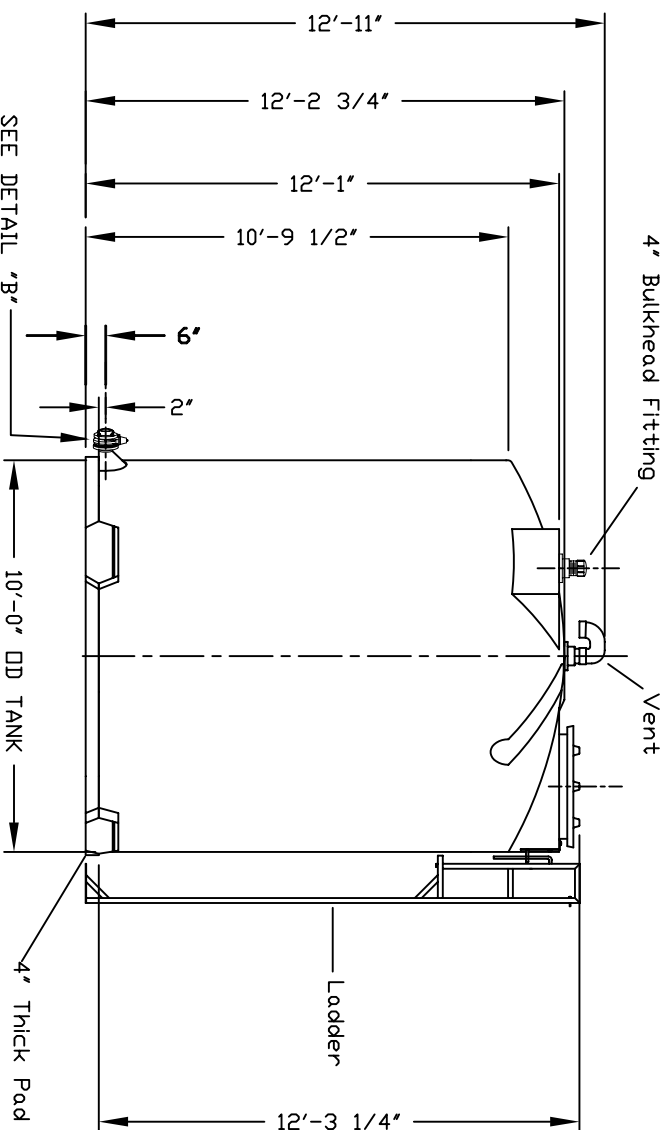


DETAIL "B"
INTEGRALLY MOLDED FLANGED OUTLET (IMFD)
SCALE: NONE

- NOTES:**
1. THIS IS A COMPUTER GENERATED DRAWING. DO NOT REVISE BY HAND.
 2. DIMENSIONS WILL VARY ±3% DUE TO VARIATIONS IN MULTIPLE MOLDS & CONDITIONS PREVALENT DURING MANUFACTURE & USAGE.
 3. DESIGN TANK WALL THICKNESS 1.9 SPG PRODUCT.
 4. SEE DRAWING "BK6SHUF", TITLED "BAKER 6500 GALLON STORAGE TANK TYPICAL FITTING INSTALLATION", FOR FITTING LOCATIONS.

SPECIFICATIONS

Tank Weight: 1650 lbs.
Pad Weight: 450 lbs.
Tank Material: H.D.P.E
Design Pressure: 0 psig
Design Vacuum: Atmospheric only
Temperature Limit: 150 degrees F
Specific Gravity Limit: Original Style 1.65
Total Drain 1.90

The information contained herein is proprietary to Baker Tanks and shall not be reproduced or disclosed in whole or in part, or used for any design or manufacture except when user obtains direct written authorization from Baker Tanks.



3020 OLD RANCH PARKWAY
SEAL BEACH, CA 90740-2751

REV.	DESCRIPTION	DATE	BY	SCALE:	SIZE	ORIGINAL DWG. DATE
G				Do Not Scale	B	05SEP02
F						
E						
D	Revised dimensions	10/9/06	PJB			
C	Added ladder & add'l dimensions	6/2/06	PJB			
B	Fixed lineweights	7/12/05	Z.E.R			
A	Added pod, valves, vent & bulkhead fitting.	3/10/05	PJB			
REV.	DESCRIPTION	DATE	BY	DRAWING NO. S-3-M0002-1-		
						REV. D

TITLE
6500 GALLON POLY TANK
SHEET 1 OF 1

DRAWING NO. S-3-M0002-1- REV. D